

# COMBINATION STACK DRYER/DRYER – 60 Hz

MLE/MLG26PDB  
MLE/MLG26PRB

MLE/MLG26PRK  
MLE/MLG27PD

MLE/MLG27PN



## LARGE CAPACITY

- Two 7.4 cu. ft. capacity dryers allow for large loads to be dried effectively
- Delivers an optimal drying experience for users and helps maximize productivity



## CONTROLS TO MEET YOUR NEEDS

- An intuitive setup with easily programmable controls
- Allows owners to take control of their revenue streams with time-of-day pricing and additional costs for end-user upgrades
- Simple, one-touch cycle selection provides clear options for end users



## FRONT-ACCESS PANEL

- Streamlines self-service by providing quick entry to the motor, transmission, and wash tub
- Minimizes downtime to help keep the machine running




## BUILT TO LAST

- Porcelain enamel top — a durable finish that stands up to the demands of high-traffic
- Front-panel accessibility — provides fast entry to internal components for streamlined self-service
- Blower guard — reduces service calls, helping to keep machines running at optimal turns



COIN READY  
MLE/MLG26PDB

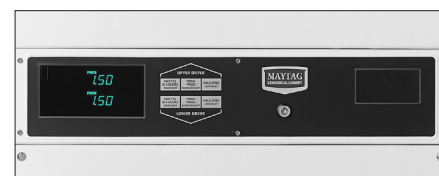

CARD READER READY  
MLE/MLG26PRB

### SINGLE-LOAD STACK DRYER/DRYER — 60 Hz

FUEL TYPE	MODEL NUMBER	PAYMENT CONFIGURATION
Electric	MLE26PDB MLE27PD	Coin Drop
Electric	MLE26PRB MLE26PRK	Card Ready
Electric	MLE27PN	Non-Vend
Gas	MLG26PDB MLG27PD	Coin Drop
Gas	MLG26PRB MLG26PRK	Card Ready
Gas	MLE27PN	Non-Vend



**AMERICA**  
AN AMERICAN COMPANY FOR OVER 100 YEARS

See [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for warranty details.

VISIT [MAYTAGCOMMERCIALLAUNDRY.COM](http://MAYTAGCOMMERCIALLAUNDRY.COM) FOR MORE INFORMATION.

®/™ © 2021 Maytag. All rights reserved.  
D201015MY 03/21

# COMBINATION STACK DRYER/DRYER – 60 Hz


MLE/MLG26PDB  
MLE/MLG26PRB

MLE/MLG26PRK  
MLE/MLG27PD


MLE/MLG27PN



## SIDE VIEW

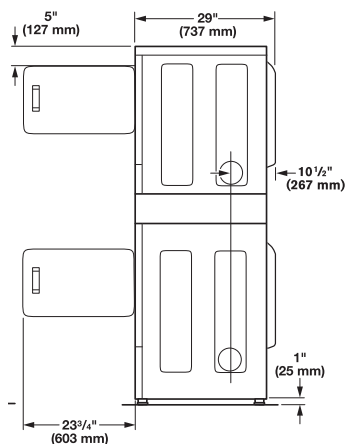

## BACK VIEW

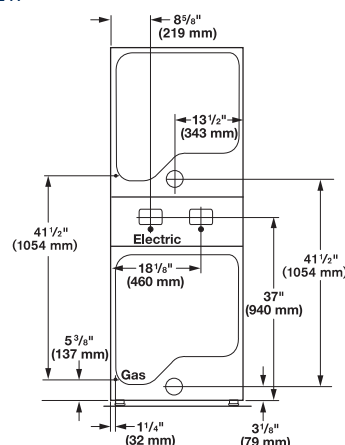

## MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	Rigid Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	130 ft. (39.6 m)	129 ft. (39.3 m)
1	125 ft. (38.1 m)	119 ft. (36.3 m)
2	115 ft. (35.1 m)	109 ft. (33.2 m)
3	106 ft. (32.2 m)	100 ft. (30.5 m)
4	98 ft. (29.9 m)	92 ft. (28 m)

Maximum length of vent system depends upon the type of vent used, number of elbows, and type of exhaust hood. For vent systems not covered by the vent specification chart, see your parts distributor.



\*Use 4" (100 mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, non-metal or combustible duct. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice. Export model ships without coin-drop mechanism.

MODELS	MLE26 (PD/PR) MLE27 (PD) MLE27 (PN)	MLG26 (PD/PR) MLG27 (PD) MLG27 (PN)	MLE26 (PD/PR) MLE27 (PD) MLE27 (PN)
Fuel Type	Electric	Gas	Electric (Canada)
CAPACITY			
Cylinder Volume — cu. ft. (liters)	7.4 (209.5)	7.4 (209.5)	7.4 (209.5)
Cylinder Diameter — in. (mm)	26.26 (667)	26.26 (667)	26.26 (667)
Cylinder Depth — in. (mm)	23.2 (590)	23.2 (590)	23.2 (590)
DIMENSIONS			
Width — in. (mm)	27 (686)	27 (686)	27 (686)
Depth — in. (mm)	29 (737)	29 (737)	29 (737)
Height — in. (mm)	74.25 (1,886)	74.25 (1,886)	74.25 (1,886)
Door Opening — in. (mm)	20.25 (514)	20.25 (514)	20.25 (514)
Exhaust Duct Diameter — in. (mm)	4 (101.6)*	4 (101.6)*	4 (101.6)*
CRATED DIMENSIONS			
Crated Width — in. (mm)	28.7 (730)	28.7 (730)	28.7 (730)
Crated Depth — in. (mm)	33.4 (848)	33.4 (848)	33.4 (848)
Crated Height — in. (mm)	79.1 (2008)	79.1 (2008)	79.1 (2008)
APPROXIMATE WEIGHT			
Uncrated — lb (kg) Coin Drop & Coin Slide Models	272 (123.4)	275 (124.7)	275 (124.7)
Uncrated — lb (kg) Card Ready & Non-Vend Models	250 (113.4)	250 (113.4)	250 (113.4)
Crated — lb (kg) Coin Drop & Coin Slide Models	294 (133.4)	294 (133.4)	294 (133.4)
Crated — lb (kg) Card Ready & Non-Vend Models	275 (124.7)	275 (124.7)	275 (124.7)
ELECTRICAL REQUIREMENTS			
Voltage	240V - 60Hz	120V - 60Hz	240V - 60Hz
Breaker/Fuse — amps	30	15	30
Airflow — CFM (CMM)	200 (5.7)	215 (6.1)	215 (6.1)
Electric Heating Element (watts)	5,600	N/A	5,250
Gas Rating — BTU/hr (kcal/hr)	N/A	22,000 (5,544)	N/A
Gas Inlet Size — in.	N/A	3/8 N.P.T.	N/A
Motor Size — HP (kW)	1/3 (.25)	1/3 (.25)	1/3 (.25)